

Neu!
Version „HD“ für
Hohlwand-Dosen

ACCUFIX - Inwall switch with integrated battery




Makes blinds and shutters safer in case of emergency!



- Enables operation of roller-shutters, blinds, screens, venetian blinds, black-out blinds etc. also in case of a power blackout
- Up to 20 cycles of operation in battery mode
- Fits into standard „inwall“ installation boxes (71mm)
- Acoustic detection of ANY smoke detector alarm; no wiring required
- Alarm function will be operated automatically. Faulty operation by user is excluded
- connects to Mediola-Smarthome-System
- Easy operation by buttons, remote control and/or integrated timer
- Permanent charging and surveillance of integrated batteries; Long term maintenance cyclus (4 years)
- Easy, fast, affordable

Technical specification:

Input: 110/230V
 Output: 12V (24V)
 Dimension controller: 50 x 50 x 15 mm
 Dimension inwall box: 57 x 57 x 61 mm
 RF frequency: 868,3 Mhz
 Frequency of alarm: 2,5 KHz - 4,0 KHz
 Batteries: LiPo, 4 x 3,7V=14,8V
 Capacity batteries: 350 mAh
 IP protection class: Ip20
 Operation temp.: +4° - +40°C

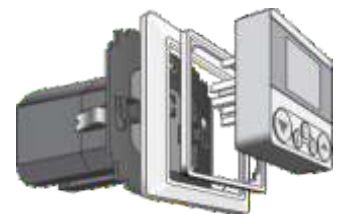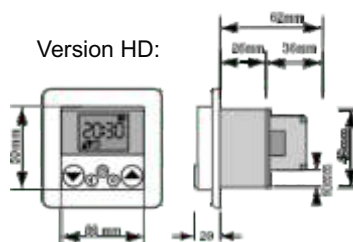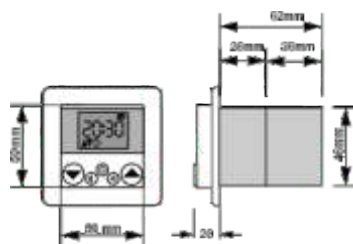

www.ozroll.eu